

Series
VENTS VUT V mini



A1 speed controller

Air handling units with the air capacity up to **300 m³/h** in the compact sound- and heat-insulated casing with vertical duct connections

Series
VENTS VUT H mini



A1 speed controller

Air handling units with the air capacity up to **300 m³/h** in the compact sound- and heat-insulated casing with horizontal duct connections

■ **Description**

Air handling units VUT mini are the complete ventilation units designed for air filtration, heating and supply to the premises and removal of exhaust air. The heat of the exhausted air is transferred to the supply air through the plate heat exchanger. All the models are compatible with 100 and 125 mm round ducts.

■ **Modifications**

VUT V mini – the models with vertical duct connections, fans with AC motors.

VUT H mini – the models with horizontal duct connections, fans with AC motors.

■ **Casing**

Made of aluzinc, internally filled with 20 mm mineral wool heat- and sound-insulating layer.

■ **Filter**

Two G4 built-in filters ensure supply and exhaust air filtration.

■ **Fans**

The unit is equipped with supply and exhaust centrifugal fans with backward curved blades and built-in thermal overheating protection with automatic restart. The electric motors and the impellers are dynamically balanced in two planes.

■ **Heat exchanger**

The plate heat exchanger is made of aluminium plates. Whenever heat recovery is not required for unit operation the heat exchanger block can be easily replaced by a «summer» block. The unit is also equipped with the drain pan for condensate drainage as well as with built-in icing protecting system. During operation of the heat exchanger in the winter time the heat from the warm exhaust air is transferred to the cold supply air. During extract air heat energy extraction some condensate can be generated. If the temperature of the intake air is below -5 °C the condensate can get frozen. To prevent the heat exchanger freezing electronic protection system is applied. It switches the supply fan off as the

temperature sensor requires. Warm extract air defrosts the heat exchanger, then the supply fan switches on and the unit continues operating under rated conditions.

■ **Control**

Switching the unit on and its capacity control is performed with thyristor A1 speed controller (RS-1-400) which provides smooth speed control over the range of 0-100%.

■ **Mounting**

Air handling unit is mounted on the floor and suspended to the ceiling by means of a seat angle with inserted vibration-damping element or attached to a wall with brackets. The unit can be mounted either in service spaces or in main premises above the suspended ceiling, in the pocket or the unit can be placed directly in the room. Mounting position shall provide correct condensate drainage. Access for maintenance and filter cleaning shall be reserved on the side of the removable side panel on the left from supply air side.

Designation key: _____

Series	Rated air capacity [m ³ /h]	Duct connection	Type	Integrated automation control
VENTS VUT	200; 300	V – vertical H – horizontal	mini	(RS) – A1 (RS-1-400) speed controller

Accessories



page 378

page 378

page 442

page 447

page 455

page 498

page 499



page 302

page 302

Technical data:

	VUT 200 H mini	VUT 200 V mini	VUT 300 H mini	VUT 300 V mini
Voltage [V / Hz]	1~ 220-240 / 50-60		1~ 220-240 / 50-60	
Maximum fan power [W]	2pcs. x 58		2pcs. x 58	
Fan current [A]	2pcs. x 0.26		2pcs. x 0.26	
Total unit power [W]	116		116	
Total unit current [A]	0.52		0.52	
Air capacity [m³/h]	200		300	
RPM	2500		2500	
Noise level at 3m [dBA]	24-45		28-47	
Transported air [°C]	-25 up to +50		-25 up to +50	
Casing material	aluzinc		aluzinc	
Insulation	20 mm mineral wool		20 mm mineral wool	
Filter: extract / supply	panel filter G4		panel filter G4	
Replaceable filter*	SF VUT mini G4		SF VUT mini G4	
Summer block*	VL VUT mini		VL VUT mini	
Connected air duct diameter [mm]	Ø 100		Ø 125	
Weight [kg]	30		30	
Heat recovery efficiency	up to 85%		up to 85%	
Heat exchanger type	cross-flow type		cross-flow type	
SEC Class			C	
Heat exchanger material	aluminum		aluminum	

*modification: replacable filter, summer block

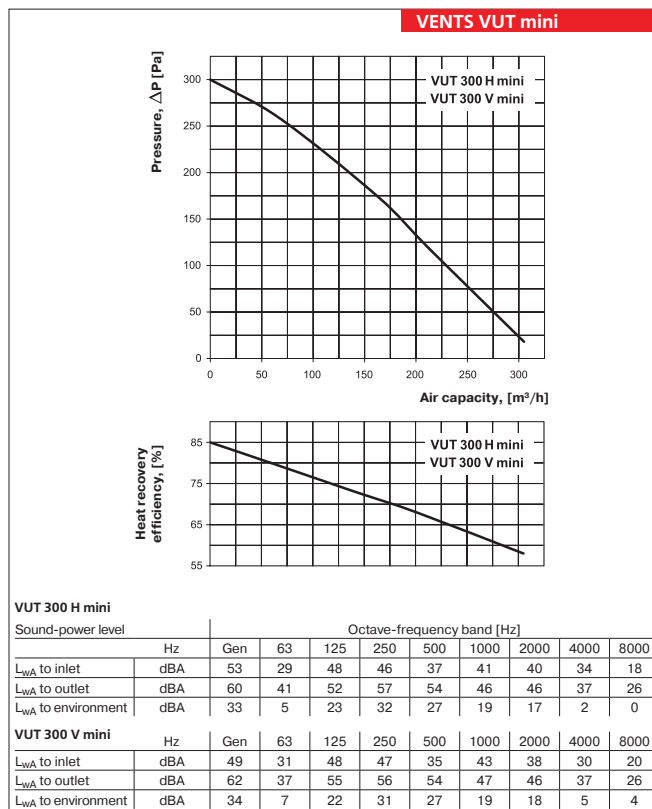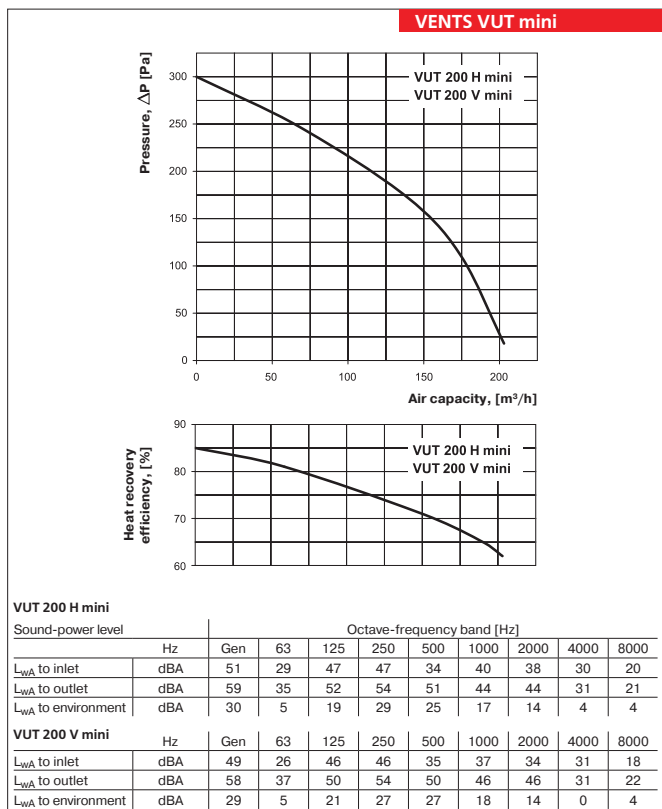

VENTS VUT mini
AIR HANDLING UNIT WITH HEAT RECOVERY SERIES

Unit overall dimensions:

Type	Dimensions, [mm]										
	ØD	B	B1	B2	B3	H1	H2	H3	L	L1	L2
VUT 200 H mini	99	278	200	121	192	431	84	107	699	640	600
VUT 300 H mini	124	278	200	139	139	431	89	207	699	640	600

Type	Dimensions, [mm]												
	ØD	B	B1	B2	B3	H	H1	L1	L2	L3	L4	L5	L6
VUT 200 V mini	99	278	200	109	169	450	431	640	600	73,5	204	396	529
VUT 300 V mini	124	278	200	100	178	450	431	640	600	74	210	390	526

